

**CXHA**  
chuangxinhengan Gate  
中国 · 创新恒安门业




# Cantilever Sliding Series

悬浮平移系列



<http://www.cxhdoor.com>  
<http://www.automaingate.com>  
<http://cxha.en.alibaba.com>



门体规格 (mm)	门体重量 (kg)				门体长度 (mm)	门体高度 (mm)
	1.5m	2.0m	2.5m	3.0m		
1.5m	150	180	210	240	2000	2000
2.0m	200	240	280	320	2000	2000
2.5m	250	300	350	400	2000	2000
3.0m	300	360	420	480	2000	2000
1.5m	150	180	210	240	2500	2500
2.0m	200	240	280	320	2500	2500
2.5m	250	300	350	400	2500	2500
3.0m	300	360	420	480	2500	2500
1.5m	150	180	210	240	3000	3000
2.0m	200	240	280	320	3000	3000
2.5m	250	300	350	400	3000	3000
3.0m	300	360	420	480	3000	3000

1. 门体规格 (mm) 2. 门体重量 (kg) 3. 门体长度 (mm) 4. 门体高度 (mm)



闭门器

闭门器有机械式自动关闭功能，当4个人或1门体中有人时，门体会自动关闭，可以有效防止人员进入。

The mechanical self-closing door closes code can't to enter, the door will close automatically, and can effectively prevent the danger of trespassing.



防火

门体作为防火通道，能有效防止火灾，当发生火灾时，门体可以自动关闭。

As a fire exit, will prevent escape, when occur danger, and not through this door.



防撞器

除了防撞器，为了方便进出，还可以通过红外线感应门，当有人进入时，门体自动关闭，可以有效防止人员进入。

In addition to remote control, in order to facilitate and not the door to collide with, enter the back door will close automatically, more convenient to use freely.

**CXHM**  
中国·邯郸  
709G



**CXHM**  
中国·邯郸  
710G



**CXHM**  
中国·常州  
712G



**CXHM**  
中国·常州  
711G



**CXHM**  
中国·常州


伸缩门  
**CH-708G**



立柱细节



伸缩门门框

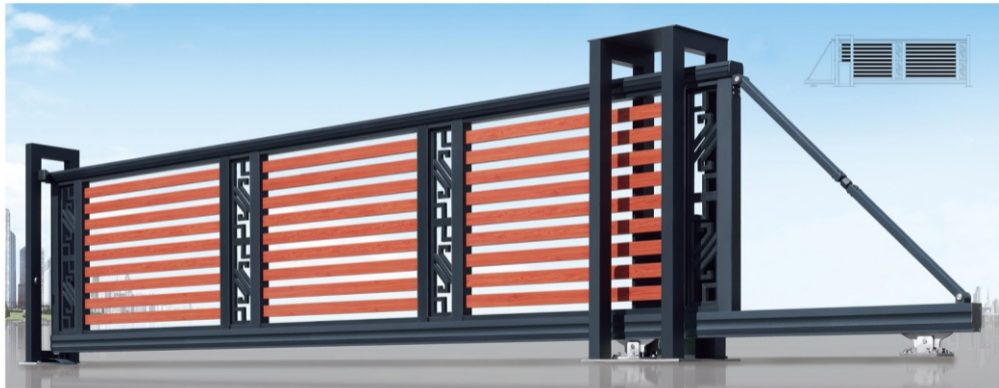

**CXHM** | 901Gr  
中国·首家安全门企

精工之美 演绎经典精髓。

SEIKO CLASSIC INTERPRETATION OF THE ESSENCE OF BEAUTY.



序号	门体参数			高度参数		备注
	门体净空(L1)	门体总长(L2)	施工总长度	L4	L5	
1	3000	4200	4600	2250	600	
2	3500	4700	5100	2750	600	
3	4000	5200	5600	3250	600	
4	4500	5700	6100	3750	700	
5	5000	6200	6600	4250	700	
6	5500	6700	7100	4750	700	
7	6000	7200	7600	5250	800	
8	6500	7700	8100	5750	800	
9	7000	8200	8600	6250	1000	
10	7500	8700	9100	6750	1000	
11	8000	9200	9600	7250	2000	
12	8500	9700	10100	7750	2000	
13	9000	10200	10600	8250	2500	
14	9500	10700	11100	8750	2500	
15	10000	11200	11600	9250	3000	

1. 门体净空数据与门架之间为双向向内空，门体净空与门架相等。
2. 此数据适用于114吨重的产品。
3. 不同支点的吊重门只能保证净空5米以下，特殊订单除外。
4. 以上单位为毫米
5. 此系统吊杆不可共用



**CXHM**  
 中国·常州恒美门业  
 希顿斯-盖茨别墅门  
**CH-01G**

生活讲究品质，与非凡的品味相匹配，需要的是永恒，以简约的线条，追求  
 永恒的品质，展现的是对生活的热爱，对品质的追求，对生活的态度，对生活的  
 Life means on the neo-classical architectural beauty inseparable with the world, abandon the complicated  
 decoration, you like the most classic of classic elements, the most simple technique of expression,  
 to show a sense of history and cultural feeling of depth, lines is simple, but still bright glory, and classical  
 art is quite rich.







**CXHM**  
中国·创兴恒安门业

创兴恒安-直排别墅门  
CH-03B



不锈钢门花 铝合金



**CXHM**  
中国·创兴恒安门业

CHUANGXINHENGAN GATE  
HEATON SERIES

创兴恒安系列  
创兴恒安-直排门  
CH-301B











CH-605C

**CXHM**  
 中国·创想恒安  
 CHUANGXINHENGAN GATE  
**HEATON SERIES**  
 ● 创想系列

创想系列-百叶封板  
 CH-602B

该系列门体，采用加厚型铝合金型材，表面经电泳处理，防腐防锈能力强；门体采用高强度钢板，表面经电泳处理，防腐防锈能力强；门体采用加厚型铝合金型材，表面经电泳处理，防腐防锈能力强；门体采用加厚型铝合金型材，表面经电泳处理，防腐防锈能力强。

Body has, crafted from various parts of aluminum alloy, thick volume due the entire section door surface supporting force; each close, will be touched by this strong, used to the strong and resisting, this opened door (several) reason.



CH-605C



创馨恒-悬浮门  
CH-701G



**CXHM**  
中国·创馨恒木门业

CHUANGXINHENGAN GATE  
HEATON SERIES  
● 创馨恒系列

门框采用铝包木，门扇采用实木，一体化设计，整体感更强，造型大方，线条流畅，质感细腻，经久耐用。

Door design with oak frame and oak the all-round integrated heating system, everything is natural, while still a perfect match. Between combining, raising naturally smooth, smooth and elegant, quiet and calm, like a gentleman, quietly captured an everything thing.



创馨恒-悬浮门  
CH-702G

**CXHM**  
中国·创馨恒木门业



铝包木，增加门框的安全性  
Inward sheathing, increase the safety performance of the door.



铝包木，增加门框的安全性  
Aluminum cross-section analysis and design, increased texture of the aluminum is more beautiful but also enhances the rigidity and toughness.



接近开关，电子感应  
Proximity switches, electronic sensors.



实心铸铝花  
Solid cast aluminum door flowers.





#### 防撞保护装置

在门关闭状态下，当有障碍物阻挡时，门体内部防撞系统通过红外线探测障碍物并立即工作，立即发出停止信号，门体立即停止运行并自动退回1.5M 的距离。

Door is operating conditions, when the closing to the process or things to reach process. The pressure sensor among the infrared transmitter module to transmit signals to the control board, control board received signal, the door immediately stop forward and automatically return to approximately 1.5 meters stop running.



#### 可调节正装置

优质塑料轮与轴承完美结合，摩擦保护装置，保证门体顺畅运行。

High quality plastic wheel and bearing perfect combination of better protective bearing to ensure that the door to run smoothly.



#### 门板

精雕细琢，以修正加工误差，确保门体顺畅运行。

Screw adjustment to correct the error of construction to ensure the precise installation of the door.



防撞示意图



CH803B

**CXHM**

希顿斯-曼洋门  
CH-803B



#### 遥控器

设计美观，操作简单，安装方便，可折叠。

Smooth curves, high-end and elegant, perfect for when the collection.



#### 材料

采用挤压型材设计分析，产品结构强度高，减少材料使用，避免材料浪费。

Analysis using挤压型材设计分析, the product structure is more reasonable to reduce the deformation of the material, reducing the rigidity of the material.